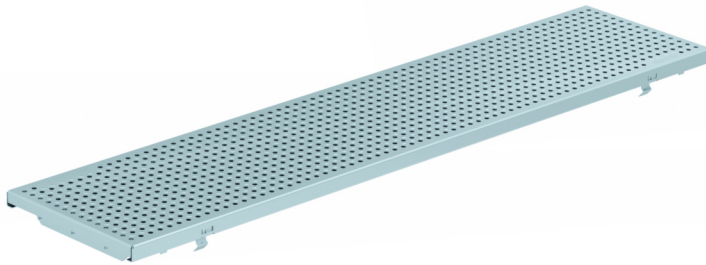


**ADA HEELPROOF Perforated grating - Stainless steel**

**Product Features:**

- Certified to EN 1433 Load Class C 250 kN - 56,200 lbs
- Uses fiX self-locking system
- Suitable to use with NW200 channels
- Manufactured from Grade 304 (1.4301) stainless steel
- Complies with ADA - American Disabilities Act.

**Installation:**

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations

**Gratings FILCOTEN® pro – E 200 (8") with fiX self-locking system.**

	Item no.	Gratings	Material	Dimension	Load class as per EN-standard	Slot-/Mesh width	Weight		Inlet cross-section sq.inches/m	Inlet cross-section cm2/m
							Lbs	Kg		
○	17020328	ADA HEELPROOF Perforated grating	stainless steel	39.40"/8.74"/0.78" 1000/222/20	C 250 kN	Ø 1/4" hole (6,0 mm)	29.76	13.5	44.64	288
○	17020329	ADA HEELPROOF Perforated grating	stainless steel	19.70"/8.74"/0.78" 500/222/20	C 250 kN	Ø 1/4" hole (6,0 mm)	14.77	6.7	44.64	288

**Specification:** FILCOTEN pro-E NW200, heavy duty, (Load Class C 250 kN), stainless steel (Type 304), reinforced grate is 8.74" (222mm) wide, 39.40" (1000mm) long, 0.78" (20mm) high, weighing 29.76 lbs (13.5 kg). The grate has Ø1/4" (6mm) diameter hole and is ADA compliant and Class C load rated - commercial applications. The grate is secured to the body with four point fiX self-locking (snap-on) system. Stainless steel manufactured and tested according to EN1433 - CE certified.

C250kN d6: E 17020328 (17020329)

