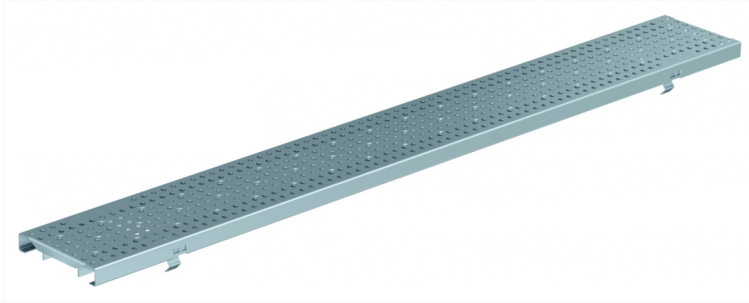


**ADA HEELPROOF Perforated grating - Stainless steel**

**Product Features:**

- Certified to EN 1433 Load Class A 15 kN 3,372 lbs
- Uses fiX self-locking system
- Suitable to use with NW100 channels.
- Manufactured from Grade 304 (1.4301) stainless steel
- Complies with ADA - American Disabilities Act

**Installation:**

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations

**Gratings FILCOTEN® pro – E 100 (4") with fiX self-locking system.**

	Item no.	Gratings	Material	Dimension	Load class as per EN-standard	Slot-/Mesh width	Weight		Inlet cross-section	Inlet cross-section
							Lbs	Kg	sq.inches/m	cm2/m
○	17010304	ADA HEELPROOF Perforated grating	stainless steel	39.40"/4.80"/0.78" 1000/122/20	A 15 kN	Ø 1/4" hole (6,0 mm)	4.19	1.9	20.77	134
○	17010305	ADA HEELPROOF Perforated grating	stainless steel	19.70"/4.80"/0.78" 500/122/20	A 15 kN	Ø 1/4" hole (6,0 mm)	2.2	1.0	20.77	134

**Specification:** FILCOTEN pro-E NW100, light duty, (Load Class A 15 kN), stainless steel (Type 304), reinforced perforated grate is 4.80" (122mm) wide, 39.40" (1000mm) long, 0.78" (20mm) high, weighing 4.19 lbs (1.9 kg). The grate has Ø1/4" (6mm) diameter hole and is ADA compliant and Class A load rated - for pedestrian foot traffic only. The grate is secured to the body with four point fiX self-locking (snap-on) system. Stainless steel manufactured and tested according to EN1433 - CE certified.

A15kN d6: E 17010304 (17010305)

