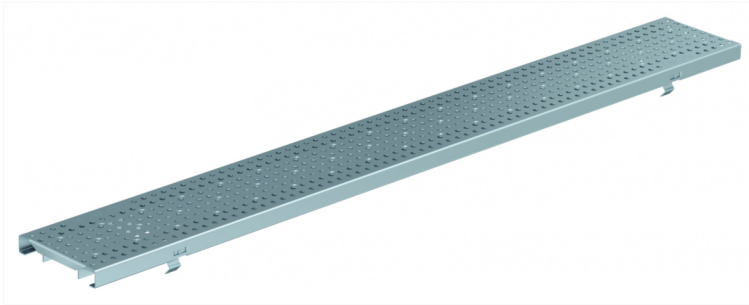


ADA HEELPROOF Perforated grating - Stainless steel

Product Features:

- Certified to EN 1433 Load Class C 250 kN 56,200 lbs
- Uses fiX self-locking system
- Suitable to use with NW100 channels
- Manufactured from Grade 304 (1.4301) stainless steel
- Complies with ADA - American Disabilities Act

Installation:

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations

Gratings FILCOTEN® pro – E 100 (4") with fiX self-locking system.

	Item no.	Gratings	Material	Dimention	Load class as per EN-standard	Slot-/Mesh width	Weight		Inlet cross-section sq.inches/m	Inlet cross-section cm2/m
							Lbs	Kg		
○	17010328	ADA HEELPROOF Perforated grating	stainless steel	39.40"/4.80"/0.78" 1000/122/20	C 250 kN	Ø 1/4" hole (6,0 mm)	7.28	3.3	20.77	134
○	17010329	ADA HEELPROOF Perforated grating	stainless steel	19.70"/4.80"/0.78" 500/122/20	C 250 kN	Ø 1/4" hole (6,0 mm)	3.75	1.7	20.77	134

Specification: FILCOTEN pro-E NW100, heavy duty, (Load Class C 250 kN), stainless steel (Type 304), reinforced perforated grate is 4.80" (122mm) wide, 39.40" (1000mm) long, 0.78" (20mm) high, weighing 7.28 lbs (3.3 kg). The grate has Ø1/4" (6mm) diameter hole and is ADA compliant and H-20 load rated - commercial applications. The grate is secured to the body with four point fiX self-locking (snap-on) system. Stainless steel manufactured and tested according to EN1433 - CE certified.

C250kN d6: E 17010328 (17010329)

