


Perforated grating - Galvanized steel

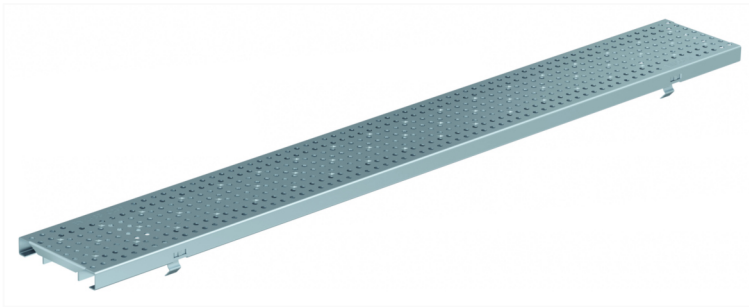

Product Features:

- Certified to EN 1433 Load Class C 250 kN 56,200 lbs.
- Uses fiX self-locking system.
- Suitable to use with NW100 channels.
- Manufactured from galvanized steel
- Hot-Dip galvanized material.
- Complies with ADA - American Disabilities Act.

Installation:

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Gratings FILCOTEN® pro – v 100 (4") with fiX self-locking system.

	Item no.	Gratings	Material	Dimention	Load class as per EN- standard	Slot-/Mesh width	Weight		Inlet cross- section sq.inches/m	Inlet cross- section cm2/m
							Lbs	Kg		
○	17010228	ADA HEELPROOF Perforated grating	galvanized steel	39.40"/4.80"/0.78" 1000/122/20	C 250 kN	Ø 1/4" hole (6,0 mm)	7.28	3.3	20.77	134
○	17010229	ADA HEELPROOF Perforated grating	galvanized steel	19.70"/4.80"/0.78" 500/122/20	C 250 kN	Ø 1/4" hole (6,0 mm)	3.75	1.7	20.77	134

Specification: FILCOTEN pro-tec NW100, heavy duty, (Load Class C 250 kN), galvanized steel, reinforced grate is 4.80" (122mm) wide, 39.40" (1000mm) long, 0.78" (20mm) high, weighing 7.28 lbs (3.3 kg). The grate has Ø1/4" (6mm) diameter hole and is ADA compliant, Heelproof and Class C load rated - commercial applications. The grate is secured to the body with four point fiX self-locking (snap-on) system. Galvanized steel manufactured and tested according to EN1433 - CE certified.

C250kN d6: V 17010228 (17010229)

