


ADA Mesh grating - Galvanized steel

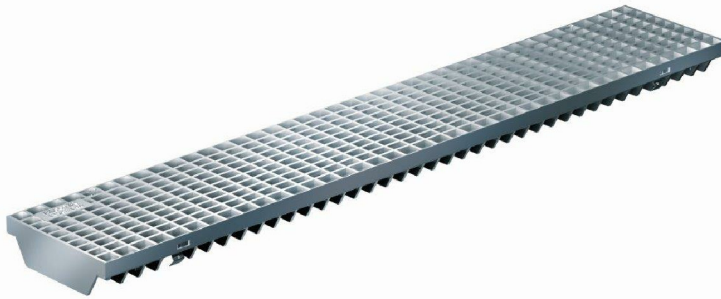

Product Features:

- Certified as per European standard EN 1433
- Load Class D 400 kN - 89,920 lbs.
- Uses fiX self-locking system.
- Suitable to use with NW150 channels.
- Manufactured from galvanized steel
- Hot-Dip galvanized material.
- Complies with ADA - American Disabilities Act.
- Suitable to use with Anti-vandalism device to prevent theft.

Installation:

- The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

Gratings FILCOTEN® pro – v 150 (6") with fiX self-locking system.

| | Item no. | Gratings | Material | Dimension | Load class as per EN-standard | Slot-/Mesh width | Weight | | Inlet cross-section sq.inches/m | Inlet cross-section cm2/m |
|---|----------|------------------|------------------|-----------------------------------|-------------------------------|---------------------------------|--------|------|---------------------------------|---------------------------|
| | | | | | | | Lbs | Kg | | |
| ○ | 17015226 | ADA Mesh grating | galvanized steel | 39.40"/6.77"/0.78" 1000/172/20 | D 400 kN | MW 0.98" x 0.39" (MW25x10mm) | 22.93 | 10.4 | 167.4 | 1,080 |
| ○ | 17015227 | ADA Mesh grating | galvanized steel | 19.70"/6.77"/0.78" 500/172/20 | D 400 kN | MW 0.98" x 0.39" (MW25x10mm) | 11.68 | 5.3 | 166.63 | 1,075 |

Specification: FILCOTEN pro-tec NW150, extra heavy duty, (Load Class D 400 kN), galvanized steel, reinforced grate is 6.77" (172mm) wide, 39.40" (1000mm) long, 0.78" (20mm) high, weighing 22.93 lbs (10.4 kg). The grate has 0.39" (10mm) wide, 0.98" (25mm) long slots and is ADA compliant and Class D load rated - for pneumatic forklift traffic, roads and highways. The grate is secured to the body with four point fiX self-locking (snap-on) system. Galvanized steel manufactured and tested according to EN1433 - CE certified.

D400kN MW25/10: V 17015226 (17015227)

