


citygrid – Heavy Duty Permeable Ground Grids
100% recycled/recyclable plastic.

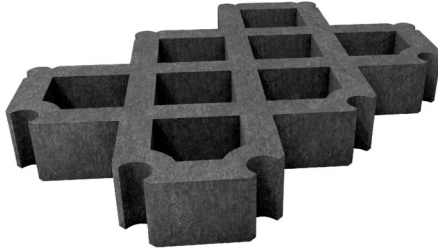

Product Features:

- Material: 100% recycled polyolefins
- Nominal size (LxWxH): 60 x 40 x 8 cm / 24" x 15.75" x 3.15"
- Unit weight: 9 kg / 19.8 lb (37,5 kg / 82.67 lb per 1 m² panel)
- Coverage: 4.17 grids/m² or 0.39 grids/ft² (1 grid = 0.24 m² / 2.58 ft²)
- Color: Grey
- Connection type: Tongue and groove
- Infiltration rate: 2,500 mm/hr for gravel

Installation:

- The permeable paver system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

citygrid - Heavy Duty Permeable Ground Grids

	Item no.	Description	Material	Dimension (LxWxH)		Weight		Coverage/unit		Infiltration rate
				Inches	mm	Lbs	Kg	sq.ft.	sq.m.	
○	80090401	citygrid - Heavy Duty Permeable Ground Grid, tongue and groove connection	plastic	24"/15.75"/3.15"	600/400/80	19.80	9.00	2.58	0.24	2500

Specification: The Heavy Duty Permeable Ground Grids (**citygrid**), plastic, grey color, reinforced paver is 24" (600mm) long, 15.75" (400mm) wide, 3.15" (80mm) high, weighing 19.8 lbs (9 kg). The unit paver is 2.58 ft² (0.24 m²), with a coverage ratio of 0.39 grids/ft² (4.17 grids/m²). **citygrid** is high load rated, used mostly for parking areas, landscaping, rest areas, access routes. The paver is equipped with tongue and groove connection system. 100% recycled/recyclable plastic manufactured and tested according to EN1433 - CE certified.

